



THE NEW ERA ACOUSTIC CRADLE

riba
product
selector

- 1 **TIMBER FLOOR**
Refer to manufacturer
for compatibility
- 2 **BATTEN**
36mm or 48mm
- 3 **PACKER**
- 4 **PERIMETER FLANKING STRIP**
10mm
- 5 **ACOUSTIC CRADLE**

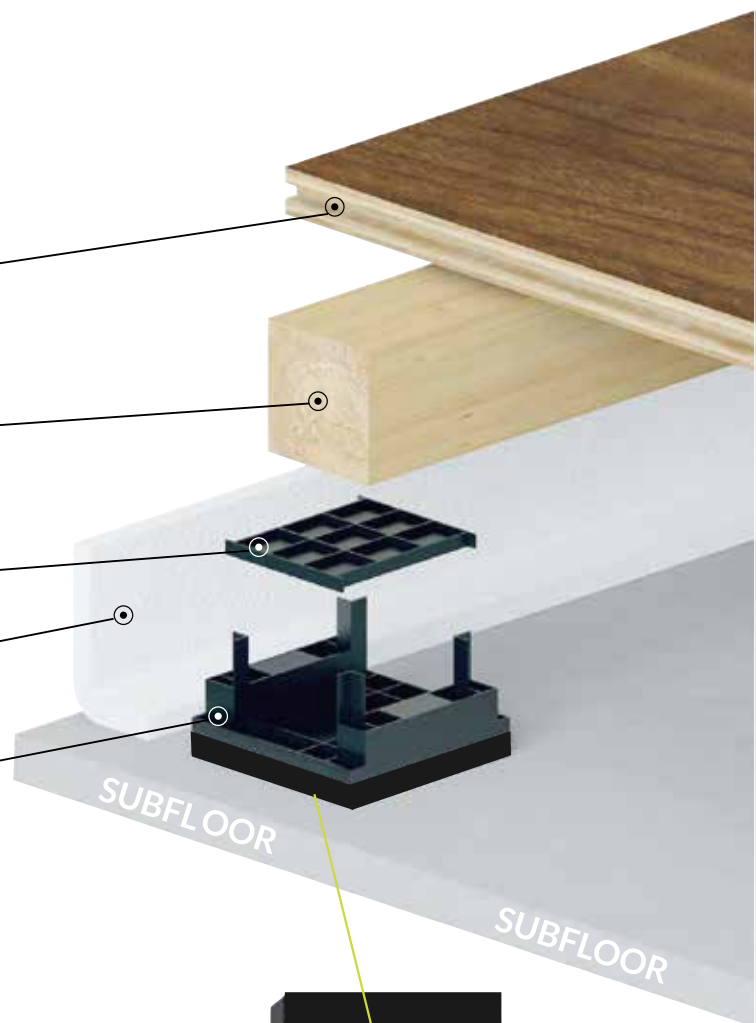

New Era cradles have been tested in compliance with the Robust Details Ltd requirements as stipulated in the Robust Detail Handbook for FFT2 resilient cradle and batten system. The minimum performance for this specification is $rd\Delta L_w = 17\text{dB}$. The New Era Acoustic Cradle achieved $rd\Delta L_w = 27\text{dB}$ with the minimum build up.

www.newerafloorsystems.co.uk/technical

Available from our distribution partner WFUK

www.woodenfloorsuk.com

SOUND REDUCTION	LIGHTWEIGHT SYSTEM	FLOOR HEIGHT RANGE	CRADLE SPACINGS	BATTENS CENTRES	LOAD CAPACITY	SUSTAINABILITY
27db minimum	IDEAL FOR HIGH RISE APARTMENT BLOCKS WHERE INTERNAL WEIGHT LOADINGS MAY BE AN ISSUE	74mm - 419mm	450mm along a 36mm batten	400mm	500kg spread load	recycled plastic cradles
			600mm along a 48mm batten		350kg point load	

